



宏钰电子（嘉善）有限公司
HONGYU ELECTRICAL (JIASHAN) CO.,LTD.

Add: No. 69 Jinxiu Road East City Development Zone,
Jiashan, Zhejiang, China
Tel: 86 573 84062088, 84062188
Fax: 86 573 84062898
http://www.hongyuzj.com
E-mail: henry@hongyuzj.com

RECEPTACLES SYSTEM



742W-2P


STANDARD : IEC 320-1 C13

RATING : 15A 250V AC

RATING : UL/CSA

RATING : 10A 250V ~

APPROVALS : VDE/DEMKO/NEMKO/
SEMKO/FIMKO/SEV

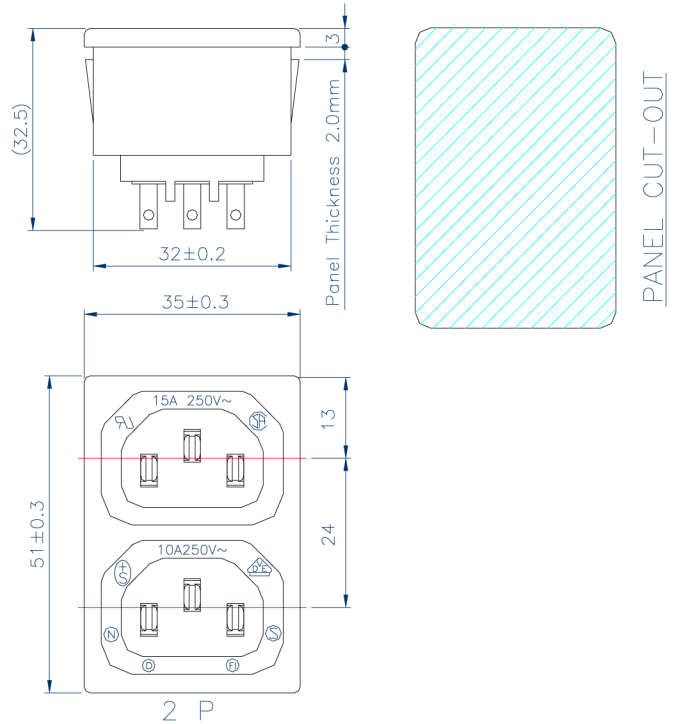

742W-2P 成品編碼規則

742W - 4 P - 20 - C 5 P B * #

2P=2Position
3P=3Position
4P=4Position

Customer panel
Thickness: 1.0mm
1.5mm
1.8mm
2.0mm
2.5mm

— : Soldering pin on the end position
/ : Soldering pin on the top position

: Body length 95mm Tad 1.3
*: Body length 96mm Tad 1.3
#: Body length 95mm Tad 1.4
*: Body length 96mm Tad 1.4

A=Flat pin
B=Bent pin

N=Without printing
P=Printing

Soldering pin number

A: 2.8mm ϕ 1.7mm hold
B: 2.8mm 3.0mm hold
C: 2.8mm 4.0mm hold
D: 6.3mm ϕ 1.7mm hold
E: 4.8mm Peachy-Hold
F: One of B(2.8mm)+2 of E(4.8mm pin)

Byword: 742W-4P-20 C 5 P B *

4 Position 2.0mm panel thickness 4.0mm soldering pin

5 bent pins with printing hole 96mm length